

Wave propagation in periodic networks of thin fibers

S. Molchanov*, B. Vainberg^{†‡}

Abstract

We will discuss a one-dimensional approximation for the problem of wave propagation in networks of thin fibers. The main objective here is to describe the boundary (gluing) conditions at branching points of the limiting one-dimensional graph. The results will be applied to Mach-Zehnder interferometers on chips and to periodic chains of the interferometers. The latter allows us to find parameters which guarantee the transparency and slowing down of wave packets.

Key words: asymptotics, wave propagation, scattering problem, slowing down, wave guide.

2000 MCS: 35J05; 35P25; 58J37; 78A40.

1 Introduction.

The paper concerns the asymptotic theory of wave propagation in networks Ω_ε of thin fibers when the thickness of fibers ε goes to zero. An approximation of a wave or heat processes in such a network by a one-dimensional problem on the limiting metric (quantum) graph has been discussed in physical literature for at least three decades. In recent years it was the subject of several mathematical conferences. The central point of the asymptotic theory is the structure of the physical field near junctions (branching points of the network). In the majority of publications on quantum graphs the gluing conditions on the vertices of the graph (they correspond to the junctions) have the simplest Kirchhoff's form. This form can be justified in some cases (say, for the heat transport in a network with insulated walls, [11], [12]). We discussed some possible applications of the quantum graph approximations to the study of periodic optical systems: structure of the spectrum, scattering, slowing down of the light, [19]-[21]. We assumed there that the Kirchhoff's GC at vertices were imposed.

*Dept of Mathematics, University of North Carolina, Charlotte, NC 28223, smolchan@uncc.edu

[†]Dept of Mathematics, University of North Carolina, Charlotte, NC 28223, brvainbe@uncc.edu

[‡]The corresponding author

However, our recent study leads us to the conclusion that the Kirchoff's GC are an exception in optical applications where the spectral parameter λ is greater than the threshold λ_0 . The latter is equivalent to the condition that the propagation of waves in the waveguides (cylindrical parts of the network) is possible. If Ω_ε is unbounded, this also means that λ belongs to the absolutely continuous spectrum of the problem. While many particular cases of that problem with $\lambda = \lambda_0 + O(\varepsilon^2)$ or $\lambda < \lambda_0$ were considered (see [1]-[30]), the publications [22]-[25] were the first ones dealing with the case $\lambda \geq \lambda_0$, and the first ones where the significance of the scattering solutions for asymptotic analysis was established. Papers [22]-[25] contain asymptotic analysis of the spectrum, resolvent and solutions of the problem in a network Ω_ε when $\varepsilon \rightarrow 0$. It was shown there that the GC in those cases have general symplectic structure and can be expressed in terms of the scattering matrices defined by individual junctions.

The main goal of the present paper is to describe the wave propagation through networks of thin fibers of necklace type resulting in general GC at the vertices of the limiting graph. We say that a network is of necklace type if it is periodic in one direction and is bounded in the orthogonal plane. The transition from the networks of thin fibers to the one-dimensional problem on the graph will be recalled in the next section (see details in [22]-[25]). The necklace type graphs will be considered in section 3. We will calculate the propagator through one period, find the dispersion relation, describe the band-gap structure of the spectrum and find reflection and transmission coefficients for the truncated graph.

The main feature which distinguishes the graph theory from the Bloch theory of 1D periodic Schrodinger (Hill) operators is that the propagator through one period is not an analytic function of the frequency anymore, but a meromorphic one. The corresponding poles (resonances) play an important role in applications. In the last section, we consider a specific necklace device and show how the earlier results allow one to find parameters which provide slowing down of the wave packets (slowing down of the light) accompanied by the transparency (almost zero reflection).

2 Transition from networks to quantum graphs.

Consider the stationary wave (Helmholtz) equation

$$H_\varepsilon u = -\Delta u = \omega^2 u, \quad x \in \Omega_\varepsilon, \quad Bu = 0 \quad \text{on } \partial\Omega_\varepsilon, \quad (1)$$

in a domain $\Omega_\varepsilon \subset R^d$, $d \geq 2$, with infinitely smooth boundary (for simplicity), which has the following structure: Ω_ε is a union of a finite number of cylinders $C_{j,\varepsilon}$ (which will be called channels) of lengths l_j , $1 \leq j \leq N$, with diameters of cross-sections of order $O(\varepsilon)$ and domains (which will be called junctions) connecting the channels into a network. It is assumed that the junctions have diameters of the same order $O(\varepsilon)$. The boundary condition has the form: $B = 1$ (the Dirichlet BC) or $B = \frac{\partial}{\partial n}$ (the Neumann BC) or $B = \frac{\partial}{\partial n} + \alpha(x)$, where n is the exterior normal and the function $\alpha \geq 0$ is real valued and does not

depend on the longitudinal (parallel to the axis) coordinate on the boundary of the channels. One also can impose one type of BC on the lateral boundary of Ω_ε and another BC on the free ends (which are not adjacent to a junction) of the channels.

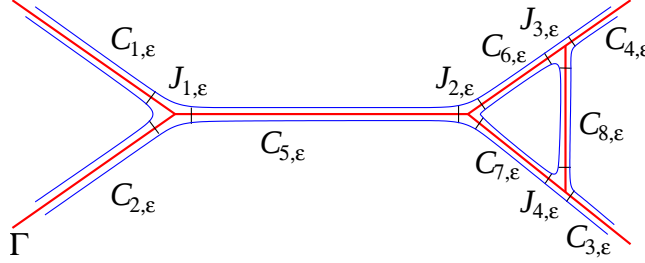


Figure 1: An example of a domain Ω_ε with four junctions, four unbounded channels and four bounded channels.

The domain Ω_ε shrinks to a one-dimensional metric graph Γ as $\varepsilon \rightarrow 0$. The axes of the channels form edges Γ_j , $1 \leq j \leq N$, of Γ , and the distances between points of Γ_j are defined by the distances between the corresponding points of the channels. The junctions shrink to vertices of the graph Γ . We denote the set of vertices v_j by V .




Figure 2: Another example of a domain Ω_ε , network of a necklace type which will be studied in more detail later.

For the sake of simplicity, we impose the following two geometrical conditions. First, we assume that all the channels $C_{j,\varepsilon}$ have the same cross-section π_ε (the general case is studied in [23]). The second condition concerns the junctions. We assume that they are self-similar. The latter means that there exist an ε -independent domain J_v and a point $\hat{x} = \hat{x}_v$ such that

$$J_{v,\varepsilon} = \{(\hat{x} + \varepsilon x) : x \in J_v\}. \quad (2)$$

From the self-similarity assumption it follows that π_ε is an ε -homothety of a bounded domain $\pi \subset \mathbb{R}^{d-1}$.

Let $\lambda_0 < \lambda_1 \leq \lambda_2 \dots$ be the eigenvalues of the negative Laplacian $-\Delta_{d-1}$ in π with orthonormal eigenfunctions $\{\varphi_n(y)\}$,

$$-\Delta_{d-1}\varphi_n(y) = \lambda_n\varphi_n(y), \quad Bu = 0 \quad \text{on } \partial\pi,$$

where B is the boundary operator on the channels defined in (1). Then $\varepsilon^{-2}\lambda_n$ are eigenvalues of $-\Delta_{d-1}$ in π_ε and $\{\varepsilon^{-d/2}\varphi_n(y/\varepsilon)\}$ are the corresponding orthonormal eigenfunctions,

$$-\Delta_{d-1}\varphi_n(y/\varepsilon) = \varepsilon^{-2}\lambda_n\varphi_n(y/\varepsilon), \quad Bu = 0 \quad \text{on } \partial\pi_\varepsilon.$$

We will call the point $\varepsilon^{-2}\lambda_0$ the threshold, since it is the bottom of the absolutely continuous spectrum of operator (1) if Ω_ε has an infinite channel.

We introduce Euclidean coordinates (z, y) in channels $C_{j,\varepsilon}$ chosen in such a way that the z -axis is parallel to the axis of the channel, hyperplane R_y^{d-1} is

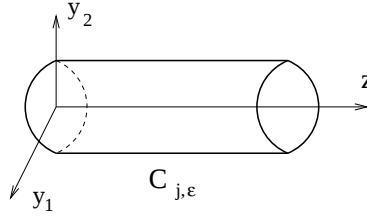


Figure 3: Local coordinates in a channel.

orthogonal to the axis, and $C_{j,\varepsilon}$ has the following form in the new coordinates:

$$C_{j,\varepsilon} = \{(z, \varepsilon y) : 0 < z < l_j, y \in \pi\}.$$

If a channel $C_{j,\varepsilon}$ is bounded ($l_j < \infty$), the direction of the z axis can be chosen arbitrarily (at least for now). If a channel is unbounded, then $z = 0$ corresponds to its cross-section which is adjacent to the junction.

We will impose the condition $(\varepsilon\omega)^2 \in (\lambda_0, \lambda_1)$ (see [23] for the general case). Note that waves governed by (1) do not propagate through the channels if $(\varepsilon\omega)^2 < \lambda_0$. There exists only one propagating mode

$$e^{\pm i\sigma z}\varphi_0(y/\varepsilon), \quad \sigma = \sqrt{\omega^2 - \varepsilon^{-2}\lambda_0}, \quad (3)$$

if $(\varepsilon\omega)^2 \in (\lambda_0, \lambda_1)$, and there are many similar modes

$$e^{\pm i\sigma_j z}\varphi_j(y/\varepsilon), \quad \sigma_j = \sqrt{\omega^2 - \varepsilon^{-2}\lambda_j},$$

if $(\varepsilon\omega)^2 > \lambda_j$.

While many particular cases of problem (1) with $(\varepsilon\omega)^2 = \lambda_0 + O(\varepsilon^2)$ or $(\varepsilon\omega)^2 < \lambda_0$ were considered (see references in [25]), the publications [22]-[25] were the first ones dealing with the case $(\varepsilon\omega)^2 \geq \lambda_0, \varepsilon \rightarrow 0$, and the first ones where the significance of the scattering solutions for asymptotic analysis of H_ε was established. In particular, it was shown there that in both cases $(\varepsilon\omega)^2 > \lambda_0$ and $(\varepsilon\omega)^2 \approx \lambda_0$, the scattering solutions for equation (1) and the resolvent of the operator H_ε can be approximated by the corresponding solutions of the one-dimensional problem on the limiting graph Γ with the GC expressed in terms of the scattering matrices of the individual extended junctions.

Let us recall the definition of scattering solutions for the problem (1) in Ω_ε when $(\varepsilon\omega)^2 \in (\lambda_0, \lambda_1)$. The scattering solution $\Psi = \Psi_{p,\varepsilon}$ describes the propagation of an incident wave with unit amplitude and frequency ω coming through the channel $C_{p,\varepsilon}$.

Definition 1 Let $\lambda_0 < (\varepsilon\omega)^2 < \lambda_1$. A function $\Psi = \Psi_{p,\varepsilon}$, $1 \leq p \leq m$, is called a solution of the scattering problem in Ω_ε if

$$(-\Delta - \omega^2)\Psi = 0, \quad x \in \Omega_\varepsilon; \quad B\Psi = 0 \quad \text{on } \partial\Omega_\varepsilon, \quad (4)$$

and Ψ has the following asymptotic behavior in infinite channels $C_{j,\varepsilon}$, $1 \leq j \leq m$:

$$\Psi_{p,\varepsilon} = [\delta_{p,j}e^{-i\sigma z} + t_{p,j}e^{i\sigma z}]\varphi_0(y/\varepsilon) + O(e^{-\frac{\alpha z}{\varepsilon}}), \quad z \rightarrow \infty, \quad \alpha > 0. \quad (5)$$

Here $\sigma = \sqrt{\omega^2 - \varepsilon^{-2}\lambda_0}$, $\delta_{p,j}$ is the Kronecker symbol, i.e. $\delta_{p,j} = 1$ if $p = j$, $\delta_{p,j} = 0$ if $p \neq j$.

Remark. The term with the coefficient $\delta_{p,j}$ in (5) corresponds to the incident wave (coming through the channel $C_{p,\varepsilon}$), $t_{p,p}$ is the reflection coefficient, the terms with coefficients $t_{p,j}$, $j \neq p$, describe the transmitted waves. The coefficients $t_{p,j} = t_{p,j}(\varepsilon, \omega)$ depend on ε and ω . The matrix

$$T = [t_{p,j}] \quad (6)$$

is called the scattering matrix.

Standard arguments based on the Green formula provide the following statement.

Theorem 2 When $\lambda_0 < (\varepsilon\omega)^2 < \lambda_1$, the scattering matrix T is unitary and symmetric ($t_{p,j} = t_{j,p}$).

It happens that the scattering solutions $\Psi_{p,\varepsilon}$ can be approximated with an exponential in ε accuracy using the scattering solutions of a one-dimensional problem on the limiting graph Γ which are defined as follows. Consider the following equation on Γ

$$-\frac{d^2}{dz^2}\psi = \sigma^2\psi, \quad \sigma = \sqrt{\omega^2 - \varepsilon^{-2}\lambda_0}. \quad (7)$$

Obviously,

$$\psi = c_{1,j}e^{-i\sigma z} + c_{2,j}e^{i\sigma z}$$

on the edges $\Gamma_j \subset \Gamma$.

We split the set V of vertices v of the graph into two subsets $V = V_1 \cup V_2$, where the vertices from the set V_1 have degree 1 and correspond to the free ends of the channels, and the vertices from the set V_2 have degree at least two and correspond to junctions.

Definition 3 We will say that $\psi = \psi_{p,\varepsilon}$ is a solution of the scattering problem on the graph Γ with the incident wave coming through the edge Γ_p if $\psi_{p,\varepsilon}$ satisfies equation (7),

$$\psi_{p,\varepsilon}(\gamma) = \delta_{p,j} e^{-i\sigma z} + t_{p,j} e^{i\sigma z}, \quad \gamma \in \Gamma_j, \quad (8)$$

on infinite edges $\Gamma_j, 1 \leq j \leq m$, and satisfies the following GC at vertices v of Γ :

$$B\psi = 0 \quad \text{at } v \in V_1, \quad (9)$$

$$i[I_v + T_v(\varepsilon\omega)] \frac{d}{dz} \psi^{(v)}(z) - \sigma[I_v - T_v(\varepsilon\omega)] \psi^{(v)}(z) = 0, \quad z = 0, \quad v \in V_2. \quad (10)$$

We keep the same BC at $v \in V_1$ as at the free end of the corresponding channel of Ω_ε , see (1), and we will specify GC (10) in the next two paragraphs. However, first we would like to stress that scattering coefficients $t_{p,j}$ in (8) are not required to coincide with those defined in (5) for the problem in the domain Ω_ε . With the appropriate choice of GC (10), these coefficients are the same, and therefore we use the same notation.

We choose the parametrization on Γ in such a way that $z = 0$ at v for all edges adjacent to this particular vertex. Let $d = d(v) \geq 2$ be the order (the number of adjacent edges) of the vertex $v \in V_2$. For any function ψ on Γ , we form a column-vector $\psi^{(v)} = \psi^{(v)}(z)$ with $d(v)$ components which is formed by the restrictions of ψ on the edges of Γ adjacent to v . We will need this vector only for small values of $z \geq 0$. The GC (10) are defined in terms of auxiliary scattering problems for extended junctions $J_{v,\varepsilon}^\infty$. Each extended junction consists of $J_{v,\varepsilon}$ and all the channels adjacent to $J_{v,\varepsilon}$. If some of these channels have finite length, we extend them to infinity (see Fig. 4). The matrix $T = T_v(\varepsilon\omega)$ is




Figure 4: An extended junction for a necklace waveguides.

the scattering matrix for the problem (1) in $J_{v,\varepsilon}^\infty$ and I_v is the unit matrix of the same size as the size of T . Note that the self-similarity of $J_{v,\varepsilon}^\infty$ implies that $T = T_v(\varepsilon\omega)$ depends only on the product $\varepsilon\omega$. Hence, T_v can be determined by solving the scattering problem in the corresponding extended junction with $\varepsilon = 1$. Now (10) is defined. We need only to take components of the vector $\psi^{(v)}$ in the same order as the order of channels of $J_{v,\varepsilon}^\infty$.

Denote by $F(\varepsilon)$ the set $\{\omega_j\}$ of the values of ω for which problem (7), (9), (10) has a nontrivial solution $\psi \in L^2(\Gamma)$ and $(\varepsilon\omega_j)^2 \in [\lambda_0, \lambda_1]$. Note that both equation and the boundary conditions of the problem depend on ω and ε . Let F^0 be the set $\{\omega_j\}$ of values of ω such that ω_j^2 is an eigenvalue of the operator H_ε

(see (1)) in one of the domains $J_{v,\varepsilon}^\infty$ and $(\varepsilon\omega_j)^2 \in [\lambda_0, \lambda_1]$. Due to self-similarity of the extended junctions $J_{v,\varepsilon}^\infty$, the set εF^0 does not depend on ε . Let F^ν be the $e^{\frac{-\nu}{\varepsilon}}$ -neighborhood of the set $F^0 \cup F(\varepsilon)$.

Theorem 4 ([25]) 1) *The set $F^0 \cup F(\varepsilon)$ has finitely many points (the number of points depends on ε).*

2) *For any interval $[\lambda_0, \lambda']$, $\lambda' < \lambda_1$, there exist $\rho, \nu > 0$ such that scattering solutions $\Psi_{p,\varepsilon}(x)$ of the problem in Ω_ε have the following asymptotic behavior on the channels of Ω_ε as $\varepsilon \rightarrow 0$*

$$\Psi_{p,\varepsilon}(x) = \psi_p^{(\varepsilon)}(\gamma)\varphi_0\left(\frac{y}{\varepsilon}\right) + r_p^{(\varepsilon)}(x), \quad \gamma \in \Gamma,$$

where $\psi_p^{(\varepsilon)}(\gamma)$ are the scattering solutions of the problem on the graph Γ and

$$|r_p^{(\varepsilon)}(x)| \leq Ce^{\frac{-\rho d(\gamma)}{\varepsilon}}, \quad (\varepsilon\omega)^2 \in [\lambda_0, \lambda'], \quad \omega \notin F^\nu.$$

Here $\gamma = \gamma(x)$ is the point on Γ which is defined by the cross-section of the channel through the point x , and $d(\gamma)$ is the distance between γ and the closest vertex of the graph.

Note that this theorem implies the coincidence of the scattering matrices of the problems on Ω_ε and on the graph Γ .

We will conclude this section by the following important proposition:

Proposition 5 *Suppose that $\det[I_v + T_v(\varepsilon\omega)]$ is not identically equal to zero. Then for all ω such that $(\varepsilon\omega)^2 \in [\lambda_0, \lambda_1]$, except at most a finite number of points, the GC (10) can be written in the form*

$$\frac{d}{dt}\psi^{(v)}(t) - \sigma A_v \psi^{(v)}(t) = 0, \quad t = 0, \quad \sigma^2 = \sqrt{\omega^2 - \varepsilon^{-2}\lambda_0}, \quad v \in V_2, \quad (11)$$

where matrix

$$A_v = -i[I_v + T_v(\varepsilon\omega)]^{-1}[I_v - T_v(\varepsilon\omega)]$$

is real valued and symmetric ($A_v = A_v'$).

Proof. Due to analyticity of T_v in λ , we need only to justify properties of A_v . From Theorem 2 it follows that the eigenvectors of T_v can be chosen to be real valued, i.e., there exists a real-valued orthogonal matrix $C_v = C_v(\lambda)$ such that $T_v = C_v^{-1}D_vC_v$ where D_v is a diagonal matrix with elements z_j , $|z_j| = 1$ on the diagonal. Numbers z_j are (complex) eigenvalues of T_v . Obviously,

$$I_v \pm T_v = I_v \pm C_v^{-1}D_vC_v = C_v^{-1}[I_v \pm D_v]C_v, \quad A_v = iC_v^{-1}[I_v + D_v]^{-1}[I_v - D_v]C_v.$$

It remains to note that the numbers $i\frac{1-z_j}{1+z_j}$ are real. ■

3 Necklace graphs

In this section we will consider a periodic metric graph Γ of the necklace type (see [20]). It has the following form: one cell of periodicity consists of two arches $\mathcal{L}_1, \mathcal{L}_2$ of lengths l_1 and $l_2 \leq l_1$ connected at end points and of a segment $\mathcal{L}_3$ of length l_3 starting at one of these points (see fig. 1). We assume that the necklace is placed horizontally. Let v_{2m-1}, v_{2m} be the left and the right end points of the segments with v_0 being the origin, and with two arches connecting the points v_{2m} and v_{2m+1} , $m = 0, \pm 1, \pm 2, \dots$.

We introduce two related local coordinates z and s on the edges of the graph. Both are the lengths of the corresponding part of an arch or a segment, measured from some end of the edge. When a neighborhood of some vertex is considered (for example when GC are defined), the distance is measured from that vertex for all the edges adjacent to this vertex. The coordinate (distance) z is used in this case. In other cases it will be convenient for us to measure the distance from the left end of the edge to the right. We will specify this situation by using parameter s instead of z . Thus, $s = z$ or $s = l - z$ where l is the length of the edge.

We equip the graph with the natural Lebesgue measure and consider the Hamiltonian H on $L^2(\Gamma)$ given by $H = -\frac{d^2}{dz^2} = -\frac{d^2}{ds^2}$ on the graph with the following GC (see (11))

$$\frac{d}{dt}\psi^{(v)}(z) - \sigma A_v(\varepsilon\omega)\psi^{(v)}(z) = 0, \quad z = 0, \quad v \in V, \quad (12)$$

at the vertices of Γ . Here and below we use

$$\sigma = \sqrt{\omega^2 - \varepsilon^{-2}\lambda_0}.$$

Our goal in this section is to study the propagation of waves on Γ governed by the equation

$$H\psi = -\frac{d^2}{dz^2}\psi = \sigma^2\psi, \quad \gamma \in \Gamma, \quad (13)$$

and GC (12). Note that both the equation and GC depend on the frequency ω and ε .

We enumerate the components ψ_j of the vector $\psi^{(v)}$ in the following order: ψ_j corresponds to the edge of the length l_j . Thus the first two components of the vector correspond to the shoulders of the loop, and the third component corresponds to the straight edge.




Figure 5: Graph Γ for the necklace waveguide.

The goal of this section is to define and evaluate the (Prüffer) monodromy operator M_σ (transfer operator over the period) for the problem (13), (12). Let $\psi' = \frac{d\psi}{ds}$ and $\begin{pmatrix} \psi \\ \sigma^{-1}\psi' \end{pmatrix}(\alpha)$ be the Cauchy data (it always will have the factor σ^{-1} in the second component) of the solution ψ of the equation (13) evaluated at the point α of a straight segment of Γ . When $\alpha = v_n$ is one of the end points of a segment, we understand this vector as the limit of the corresponding vectors evaluated at α as α approaches v_n moving along the segment (not along one of the arches). We denote by M_σ the monodromy operator:

$$M_\sigma : \begin{pmatrix} \psi \\ \sigma^{-1}\psi' \end{pmatrix}(v_0) \rightarrow \begin{pmatrix} \psi \\ \sigma^{-1}\psi' \end{pmatrix}(v_2)$$

and we denote by T_σ the (Prüffer) transfer operator over the loop:

$$T_\sigma : \begin{pmatrix} \psi \\ \sigma^{-1}\psi' \end{pmatrix}(v_0) \rightarrow \begin{pmatrix} \psi \\ \sigma^{-1}\psi' \end{pmatrix}(v_1).$$

We will use the same notations M_σ, T_σ for the matrices of the operators as for the corresponding operators.

Let us write matrix $A_v = (a_{i,j})$ (see (11), (12)) in the form

$$A_v = \begin{pmatrix} B & \delta \\ \delta^* & c \end{pmatrix}, \text{ where } B = \begin{pmatrix} a_{1,1} & a_{1,2} \\ a_{2,1} & a_{2,2} \end{pmatrix}, \delta = \begin{pmatrix} \delta_1 \\ \delta_2 \end{pmatrix} = \begin{pmatrix} a_{1,3} \\ a_{2,3} \end{pmatrix}, c = a_{3,3}. \quad (14)$$

We will need the following matrices

$$S = \begin{pmatrix} \sin \sigma l_1 & 0 \\ 0 & \sin \sigma l_2 \end{pmatrix}, \quad C = \begin{pmatrix} \cos \sigma l_1 & 0 \\ 0 & \cos \sigma l_2 \end{pmatrix}, \quad P = C + SB, \quad (15)$$

$$M = (I - P^2)^{-1}PS, \quad N = (I - P^2)^{-1}S. \quad (16)$$

Theorem 6 1) Matrix T_σ has the form

$$T_\sigma = - \begin{pmatrix} \frac{m}{\frac{m^2-n^2}{n}} & \frac{1}{n} \\ \frac{m}{n} & \frac{1}{n} \end{pmatrix}, \quad n = \langle \delta, N\delta \rangle, \quad m = c + \langle \delta, M\delta \rangle. \quad (17)$$

2) Matrix M_σ has the form

$$M_\sigma = \begin{pmatrix} \cos \sigma l_3 & \sin \sigma l_3 \\ -\sin \sigma l_3 & \cos \sigma l_3 \end{pmatrix} T_\sigma. \quad (18)$$

Proof. Let $\psi_j = \psi_j(s)$, $j = 1, 2$, be the restrictions of the function ψ on the upper and lower arches of the graph between the points v_0 and v_1 . Obviously,

$$\psi_1(s) = \frac{\psi_1(0) \sin \sigma(l_1 - s) + \psi_1(l_1) \sin \sigma s}{\sin \sigma l_1}.$$

Thus,

$$\psi_1'(0) = \frac{-\sigma\psi_1(0)\cos\sigma l_1 + \sigma\psi_1(l_1)}{\sin\sigma l_1}, \quad \psi_1'(l_1) = \frac{-\sigma\psi_1(0) + \sigma\psi_1(l_1)\cos\sigma l_1}{\sin\sigma l_1}.$$

A similar formula is valid for ψ_2 . Hence, taking into account the relation between parameters s and t , we obtain the following connection between the values of the vector $\phi = \begin{pmatrix} \psi_1 \\ \psi_2 \end{pmatrix}$ and its derivative $\frac{d\phi}{dz}$ at points v_0 and v_1 of the graph:

$$\frac{d\phi}{dz}(v_0) = -\sigma CS^{-1}\phi(v_0) + \sigma S^{-1}\phi(v_1), \quad \frac{d\phi}{dz}(v_1) = -\sigma CS^{-1}\phi(v_1) + \sigma S^{-1}\phi(v_0).$$

Let us denote the restrictions of ψ on the straight edges of the graph by ψ_3 . Consider vectors $\psi^{(v_0)} = \begin{pmatrix} \phi(v_0) \\ \psi_3(v_0) \end{pmatrix}$, $\psi^{(v_1)} = \begin{pmatrix} \phi(v_1) \\ \psi_3(v_1) \end{pmatrix}$. GC (12) implies

$$\begin{pmatrix} -CS^{-1}\phi(v_0) + S^{-1}\phi(v_1) \\ \omega^{-1}\frac{d}{dz}\psi_3(v_0) \end{pmatrix} = \begin{pmatrix} B & \delta \\ \delta^* & c \end{pmatrix} \begin{pmatrix} \phi(v_0) \\ \psi_3(v_0) \end{pmatrix},$$

$$\begin{pmatrix} -CS^{-1}\phi(v_1) + S^{-1}\phi(v_0) \\ \sigma^{-1}\frac{d}{dz}\psi_3(v_1) \end{pmatrix} = \begin{pmatrix} B & \delta \\ \delta^* & c \end{pmatrix} \begin{pmatrix} \phi(v_1) \\ \psi_3(v_1) \end{pmatrix}.$$

These equations can be rewritten in the following form

$$\begin{aligned} -(CS^{-1} + B)\phi(v_0) + S^{-1}\phi(v_1) &= \delta\psi_3(v_0), \\ -\sigma^{-1}\frac{d}{ds}\psi_3(v_0) &= \delta^*\phi(v_0) + c\psi_3(v_0), \\ -(CS^{-1} + B)\phi(v_1) + S^{-1}\phi(v_0) &= \delta\psi_3(v_1), \\ \sigma^{-1}\frac{d}{ds}\psi_3(v_1) &= \delta^*\phi(v_1) + c\psi_3(v_1). \end{aligned}$$

We multiply the first and third equations by S , replace $C + SB$ by P (see (15)) and then solve these equations for $\phi(v_0)$, $\phi(v_1)$. This implies

$$\begin{aligned} \phi(v_0) &= -(I - P^2)^{-1}PS\delta\psi_3(v_0) + (I - P^2)^{-1}S\delta\psi_3(v_1), \\ \phi(v_1) &= -(I - P^2)^{-1}S\delta\psi_3(v_0) + (I - P^2)^{-1}PS\delta\psi_3(v_1). \end{aligned}$$

We substitute these relations into the second and forth equations of the system above and then solve those equations for $\psi_3(v_1)$, $\sigma^{-1}\frac{d}{ds}\psi_3(v_1)$. This provides the transfer operator over the loop with the transfer matrix defined in (17). This completes the proof of the first part of theorem. The second statement of the theorem is obvious, since the left factor in the right-hand side of (18) is the transfer matrix over the segment $[v_0, v_1]$ of the graph. ■

study of propagation of single frequency waves and wave packets in periodic necklace waveguide Ω_ε (see Fig. 2) to a study of the corresponding problem on the necklace graph Γ (see Fig. 5). One needs only to take in correspondence the frequencies ω and σ of the waves in Ω_ε and on Γ using the relation

$$\sigma = \sqrt{\omega^2 - \varepsilon^{-2}\lambda_0}.$$

The spectrum of periodic problem (13), (12) has a band-gap structure with the bands on the σ -axis defined by the inequality

$$|F(\sigma)| < 2, \quad F(\sigma) = \text{Tr} M_\sigma,$$

where function F (called the Hill discriminant) is equal to the trace of the monodromy matrix (see Fig 6). The same function defines the dispersion relation (we will write it in the form $k = k(\sigma)$) of the problem on Γ :

$$\cos k(\sigma) = \frac{1}{2}F(\sigma) = \frac{1}{2}\text{Tr} M_\sigma. \quad (19)$$

Let $\omega = \omega_0$ belong to the frequency interval of a narrow wave packet of the problem in Ω_ε and

$$\sigma_0 = \sqrt{\omega_0^2 - \varepsilon^{-2}\lambda_0}.$$

We will find parameters l_j in such a way that

$$|F(\sigma_0)| = 0, \quad (20)$$

and there is a point $\sigma = \sigma_1$, for example, to the right of σ_0 , such that $F(\sigma)$ has a pole at $\sigma = \sigma_1$ and $|\sigma_0 - \sigma_1| = \epsilon \ll 1$. Then there is a point $\sigma' \in (\sigma_0, \sigma_1)$ such that

$$|F(\sigma)| < 1 \quad \text{for } \sigma \in \Delta = (\sigma_0, \sigma'), \quad |F(\sigma')| = 1.$$

Then interval Δ belongs to a band. From (19) it follows that $k(\sigma)$ changes by $\pi/6$ between σ_0 and σ' . Hence, $k'(\sigma) = O(1/\epsilon)$ on Δ or on some part Δ' of Δ , i.e.,

$$V_g = \frac{L}{k'(\sigma)} = O(\epsilon), \quad \sigma \in \Delta'. \quad (21)$$

Note that matrix T_σ has a pole if $n = 0$. Since matrices T_σ and M_σ differ by a rotation, one can easily choose l_3 such that $F(\sigma) = \frac{1}{2}\text{Tr} M_\sigma$ has a pole at a point where $n = 0$ (in fact, the pole of $F(\sigma)$ exists for all but specific values of l_3). Thus the following equation provides the poles of $F(\sigma)$ under an appropriate choice of l_3 (see (15)-(17))

$$n = \langle \delta, (I - P^2)^{-1} S \delta \rangle = \frac{1}{2} \langle \delta, [(I - P)^{-1} + (I + P)^{-1}] S \delta \rangle = 0, \quad P = C + SB.$$

Let us introduce the matrix

$$T = \frac{I - C}{S} = \begin{pmatrix} x & 0 \\ 0 & y \end{pmatrix}, \quad x = \tan \frac{\sigma l_1}{2}, \quad y = \tan \frac{\sigma l_2}{2}. \quad (22)$$

Then the equation $n = 0$ can be rewritten in the form

$$2n = \langle \delta, [(T - B)^{-1} + (T^{-1} + B)^{-1}] \delta \rangle = 0. \quad (23)$$

We will conclude this subsection by an re-writing (23) using the components of matrix B and vector δ (see (14)):

$$\begin{aligned} 2n = & \frac{(y - a_{2,2})\delta_1^2 + (x - a_{1,1})\delta_2^2 + 2a_{1,2}\delta_1\delta_2}{(x - a_{1,1})(y - a_{2,2}) - a_{1,2}^2} \\ & + \frac{(y^{-1} + a_{2,2})\delta_1^2 + (x^{-1} + a_{1,1})\delta_2^2 - 2a_{1,2}\delta_1\delta_2}{(x^{-1} + a_{1,1})(y^{-1} + a_{2,2}) - a_{1,2}^2} = 0. \end{aligned} \quad (24)$$

This is an algebraic equation of the forth order with respect to (x, y) . We will discuss it in more detail later.

Transparency, preliminary discussion. Let us recall the estimate (see [21]) for the reflection coefficient $r = r_N$ by a finite slab of periodic media which consists of N periods:

$$|r_N| = \left| \frac{\sin Nk(\sigma)}{\sin k(\sigma)} \right| (||M_\sigma||^2 - 2)^{1/2}, \quad (25)$$

where $||M_\sigma||$ is the Gilbert-Shmidt norm of the monodromy matrix, i.e.

$$||M_\sigma||^2 = ||(m_{i,j})||^2 = \sum_{i,j \leq 2} m_{i,j}^2.$$

We will choose parameters l_j in such a way that the frequency support Δ of the wave packet is in the middle of a band where $|F(\sigma)| < 1$. Then $|\sin k(\sigma)| > \frac{\sqrt{3}}{2}$ there, and

$$|r_N(\sigma)| = \frac{2}{\sqrt{3}} (||M_\sigma||^2 - 2)^{1/2}, \quad \sigma \in \Delta. \quad (26)$$

We will choose l_1, l_2 in such a way that $||M_{\sigma_0}||^2 = 2$, and therefore

$$r_N(\sigma_0) = 0. \quad (27)$$

Then $r_N(\sigma)$ is small in a small neighborhood of σ_0 , and we will have both the slowing down of the light and the transparency in Δ' .

Note that $||M_\sigma|| = ||T_\sigma||$ (see (18)) and that $\det T_\sigma = 1$. Thus $||T_\sigma|| \geq 2$ and $||T_\sigma|| = 2$ if matrix T_σ is orthogonal (the sum of its off-diagonal elements is zero). Hence, condition

$$(m + n)(m - n) + 1 = m^2 - n^2 + 1 = 0 \quad (28)$$

provides (27). We are going to write this condition more explicitly.

From (16), (17) it follows that

$$m+n = c + \langle \delta, (I-P)^{-1} S \delta \rangle = c + \langle \delta, [S^{-1}(I-C-SB)]^{-1} \delta \rangle = c + \langle \delta, [(T-B)]^{-1} \delta \rangle,$$

where T is defined in (22). Similarly

$$m-n = c - \langle \delta, (I+P)^{-1} S \delta \rangle = c - \langle \delta, [S^{-1}(I+C+SB)]^{-1} \delta \rangle = c - \langle \delta, [(T^{-1}+B)]^{-1} \delta \rangle.$$

We substitute the last two formulas into (28) and obtain the following exact form for (27):

$$\begin{aligned} & [c + \frac{(y - a_{2,2})\delta_1^2 + (x - a_{1,1})\delta_2^2 + 2a_{1,2}\delta_1\delta_2}{(x - a_{1,1})(y - a_{2,2}) - a_{1,2}^2}] \\ & \cdot [c - \frac{(y^{-1} + a_{2,2})\delta_1^2 + (x^{-1} + a_{1,1})\delta_2^2 - 2a_{1,2}\delta_1\delta_2}{(x^{-1} + a_{1,1})(y^{-1} + a_{2,2}) - a_{1,2}^2}] + 1 = 0. \end{aligned} \quad (29)$$

Thus, the set of transparency points $\{r_N = 0\}$ is also given by zeroes of a polynomial of forth order in (x, y) -plane, $x = \tan \frac{\sigma l_1}{2}$, $y = \tan \frac{\sigma l_2}{2}$. To be more accurate, we need to omit points where $n = 0$ from this set, since (28) provides the orthogonality of T_σ only if $n \neq 0$.

The choice of parameters. The center σ_0 in the frequency interval of the wave packet is given. We need to choose l_1 , l_2 in such a way that (27)-(29) hold at σ_0 and this point is close to a point where (24), (23) hold. Note that condition (27) is equivalent to the orthogonality of matrix T_{σ_0} . Then one can easily transfer it by rotation to a matrix with zero trace, i.e., one can find l_3 such that (20) holds. Hence, it remains to choose l_1 , l_2 appropriately.

We note that equation (28) for σ_0 contradicts the condition $n = 0$ imposed by (24), (23). Moreover, n can not vanish at a point close to σ_0 if n is smooth. In order for equation (28) to be valid at a point σ_0 and n to be zero at σ_1 which is close to σ_0 , function n has to be singular near σ_0 . Thus one must choose parameters (x, y) near the point where one of the denominators in (24) is zero. Let us choose the denominator of the first fraction. Then the numerator of the first fraction also must be small (otherwise (24) is not valid at $\sigma = \sigma_1$). By equating both the numerator and the denominator of the first fraction in (24) to zero we find that

$$x \approx a_{1,1} - a_{1,2} \frac{\delta_1}{\delta_2}, \quad y \approx a_{2,2} - a_{1,2} \frac{\delta_2}{\delta_1}.$$

Finally, we fix small ϵ and choose

$$x = a_{1,1} - a_{1,2} \frac{\delta_1}{\delta_2} + \epsilon. \quad (30)$$

Then we solve (29) for y in a neighborhood of the point $a_{2,2} - a_{1,2} \frac{\delta_2}{\delta_1}$. This implies

$$y = a_{2,2} - a_{1,2} \frac{\delta_2}{\delta_1} - \left(\frac{\delta_2}{\delta_1}\right)^2 \epsilon + \gamma \epsilon^2 + O(\epsilon)^3, \quad (31)$$

where the exact value of γ can be easily found from (29). We put $\sigma = \sigma_0$ in (22) and determine l_1 , l_2 from (30), (31). This choice of l_1 , l_2 implies (27).

By solving (24) asymptotically, we find that its solution also has the form (30), (31) with a different value of γ . This justifies the existence of a pole of the Hill discriminant at the distance $O(\epsilon^2)$ from the point σ_0 . In fact, let us omit the cubic term in (31). Then equations (30), (31) with two different values of γ define two parabolas P_1 and P_2 with the same vertex and tangent line at the vertex. If we put $\sigma = \sigma_0$ in (22) and fix ϵ , we get a point on P_1 at the distance of order ϵ from the vertex which defines l_1, l_2 . This choice implies (27). When σ changes: $\sigma = \sigma_0 + \tau$, $0 \leq \tau \leq \tau_0$, point (x, y) moves in the direction of the vector (l_1, l_2) or in the opposite direction (see 22). We may change the sign of τ , if needed, to guarantee that the point moves toward the second parabola where $n = 0$. The only unacceptable situation is when the vector (l_1, l_2) is tangent to P_1 . It will not happen in a generic case. Besides one can always avoid it by changing l_1 or l_2 , since they are defined up to an integer multiple of 2π .

The arguments above prove that wave packet with frequencies in $O(\epsilon^2)$ -semi-neighborhood of σ_0 will propagate with the group velocity $V_g = O(\epsilon^2)$ and the reflection coefficient will have order $O(\epsilon^2)$.

We conclude this subsection by the following remark. Let the geometry of the junctions be chosen. After that, we must choose specific l_1, l_2 satisfying (30), (31). It is easy to choose one of these parameters (for example, l_1) by changing the distance between two neighboring junctions, but l_2 will be defined after that by the geometry of the network. In fact it is not the geometrical, but only the optical length which plays role here. One can preserve the geometry of the network and change the refraction index in some of the channels to satisfy the relations (30), (31). This produces the same effect as changing the lengths of the corresponding channels.

Acknowledgment. The authors were supported partially by the NSF grant DMS-0706928.

References

- [1] Dell'Antonio, G., Tenuta, L.: *Quantum graphs as holonomic constraints*, J. Math. Phys., 47 (2006), 072102:1-21.
- [2] Duclos P., Exner, P.: *Curvature-induced bound states in quantum waveguides in two and three dimensions*, Rev. Math. Phys., 7 (1995), 73-102.
- [3] Duclos P., Exner P., Stovicek P.: *Curvature-induced resonances in a two-dimensional Dirichlet tube*, Ann. Inst. H. Poincaré 62 (1995), 81-101.
- [4] Exner P., Post O.: *Convergence of spectra of graph-like thin manifolds*, J. Geom. Phys., 54 (2005), 77-115.
- [5] Exner P., Šeba P.: *Electrons in semiconductor microstructures: a challenge to operator theorists*, in Schrödinger Operators, Standard and Nonstandard (Dubna 1988), World Scientific, Singapore (1989), 79-100.

- [6] Exner P. and Šeba P.: *Bound states in curved quantum waveguides*, J. Math. Phys. 30(1989), 2574 - 2580.
- [7] Exner P., Šeba P.: *Trapping modes in a curved electromagnetic waveguide with perfectly conducting walls*, Phys. Lett. A144 (1990), 347-350.
- [8] Exner P. and Vugalter S. A.: *Asymptotic estimates for bound states in quantum waveguides coupled laterally through a narrow window*, Ann. Inst. H. Poincaré, Phys. Theor. 65 (1996), 109 - 123.
- [9] Exner P. and Vugalter S. A.: *On the number of particles that a curved quantum waveguide can bind*, J. Math. Phys. 40 (1999), 4630-4638.
- [10] Exner P., Weidl T.: *Lieb-Thirring inequalities on trapped modes in quantum wires*, Proceedings of the XIII International Congress on Mathematical Physics (London 2000), International Press of Boston, 2001, pp.437-443.
- [11] Freidlin M., A. Wentzel A.: *Diffusion processes on graphs and averaging principle*, Ann. Probab., Vol 21, No 4 (1993), 2215-2245.
- [12] Freidlin M.: *Markov Processes and Differential Equations: Asymptotic Problems*, Lectures in Mathematics, ETH Zurich, Birkhauser Verlag, Basel, 1996.
- [13] Kostrykin V., Schrader R.: *Kirchhoff's rule for quantum waves*, J. Phys. A: Mathematical and General, Vol 32 (1999), 595-630.
- [14] Kuchment P.: *Graph models of wave propagation in thin structures*, Waves in Random Media, Vol.12 (2002), 1-24.
- [15] Kuchment P.: *Quantum graphs. I. Some basic structures*, Waves in Random Media, Vol.14, No 1 (2004), 107-128.
- [16] Kuchment P.: *Quantum graphs. II. Some spectral properties of quantum and combinatorial graphs*, Journal of Physics A: Mathematical and General, Vol 38, No 22 (2005), 4887-4900.
- [17] Kuchment P., Zeng H.: *Convergence of spectra of mesoscopic systems collapsing onto a graph*, J. Math. Anal. Appl. 258 (2001), 671-700.
- [18] Kuchment P., Zeng H.: *Asymptotics of spectra of Neumann Laplacians in thin domains*, in Advances in Differential Equations and mathematical Physics, Yu. Karpeshina etc (Editors), Contemporary Mathematics, AMS, 387 (2003), 199-213.
- [19] S. Molchanov, B. Vainberg, *Slowdown of the wave packet in finite slabs of periodic media*, Waves in Random Media, **14** (2004), 411-423.
- [20] S. Molchanov, B. Vainberg, *Slowing down of wave packets in quantum graphs*, Waves in Complex and Random Media, **15**, No 1 (2005), 101-112.

- [21] S. Molchanov, B. Vainberg, Slowing down and reflection of waves in truncated periodic media, *J. of Funct. Analysis*, 231 (2006), 287-311.
- [22] Molchanov S. and Vainberg B.: *Transition from a network of thin fibers to quantum graph: an explicitly solvable model*, Contemporary Mathematics, 415, AMS (2006), 227-240 (arXiv:math-ph/0605037).
- [23] Molchanov S. and Vainberg B.: *Scattering solutions in networks of thin fibers: small diameter asymptotics*, Comm. Math. Phys., 273, N2, (2007), 533-559 (arXiv:math-ph/0609021).
- [24] Molchanov S. and Vainberg B.: *Laplace operator in networks of thin fibers: spectrum near the threshold*, in Stochastic analysis in mathematical physics, 69–93, World Sci. Publ., Hackensack, NJ, 2008 (arXiv:0704.2795).
- [25] Molchanov S. and Vainberg B.: Propagation of Waves in Networks of Thin Fibers, submitted
- [26] Mikhailova, A., Pavlov, B., Popov, I., Rudakova, T., Yafyasov, A.: *Scattering on a compact domain with few semi-infinite wires attached: resonance case*. *Math. Nachr.* 235 (2002), 101–128.
- [27] Pavlov B., Robert K.: *Resonance optical switch: calculation of resonance eigenvalues*. Waves in periodic and random media (South Hadley, MA, 2002), 141–169, Contemp. Math., 339, Amer. Math. Soc., Providence, RI, 2003.
- [28] Post O.: *Branched quantum wave guides with Dirichlet BC: the decoupling case*, Journal of Physics A: Mathematical and General, Vol 38, No 22 (2005), 4917-4932.
- [29] Post O.: *Spectral convergence of non-compact quasi-one-dimensional spaces*, Ann. Henri Poincaré, 7 (2006), 933-973.
- [30] Rubinstein J., Schatzman M.: *Variational problems on multiply connected thin strips. I. Basic estimates and convergence of the Laplacian spectrum*, Arch. Ration. Mech. Anal., 160 (2001), No 4, 293-306.